**FEATURES & BENEFITS:**

- Complies to AS/NZ 2280 Standard.
- High strength ductile iron construction.
- USJ (Universal Socket Joint) deep socket entry to suit all Series 2 pipe.
- Maximum deflection 3.5deg.
- All fittings supplied with Plascoat coating for superior protection and ease of repair.
- Coating complies with AS/NZS 4158 & 4020. (WSAA Product Appraisal 05/12).

**GENERAL APPLICATIONS:**

- USJ Pipeline fittings are used in the construction of new pipelines.
- For use with potable & non-potable water & waste.

TECHNICAL DATA:

- Sizes available from 100 – 150mm
- Operating pressure up to 1600kPA.



DIMENSIONS

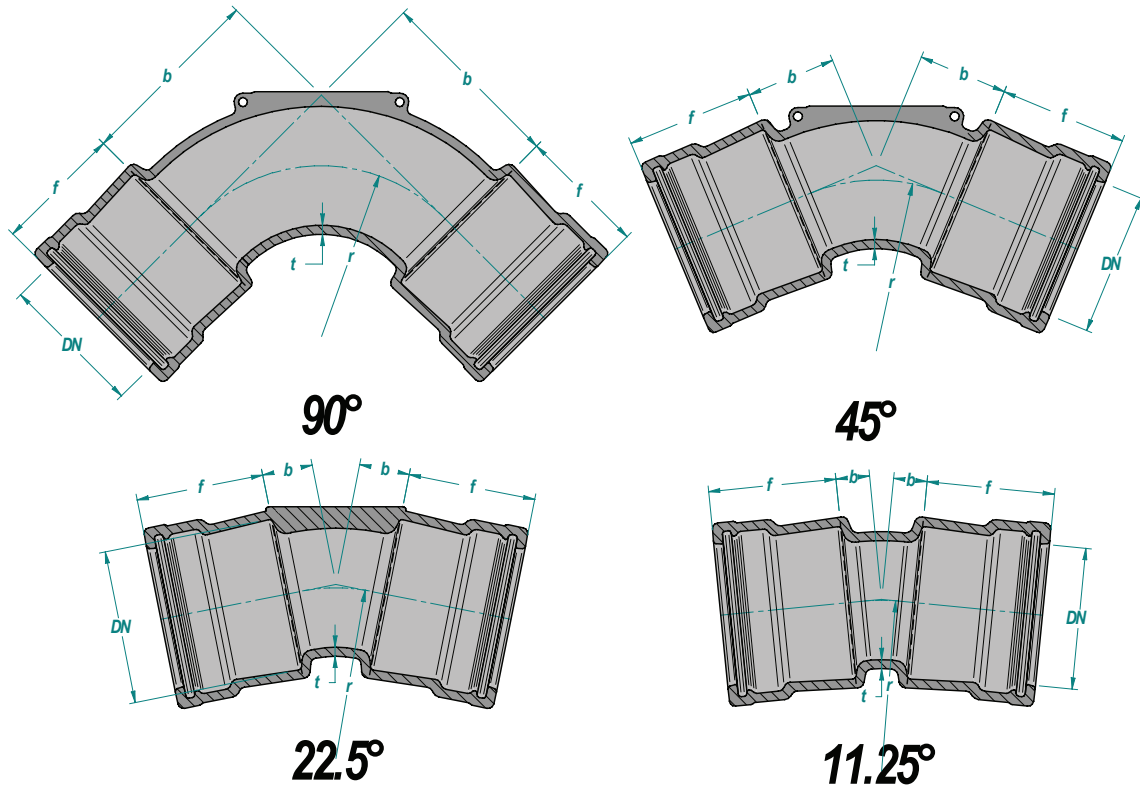


Table 1: Dimensions – Stated in mm

DN (mm)	ANGLE	t(nom)	r	b	f
100	11.25°	8	152	30	114
100	22.5°	8	152	45	114
100	45°	8	152	80	114
100	90°	8	152	165	114
150	11.25°	9	190	35	121
150	22.5°	9	190	55	121
150	45°	9	190	95	121
150	90°	9	190	205	121



Disclaimer: Users of the Gillies Metaltech products and/or information within this document must make their own assessment for suitability for their particular circumstances. Product dimensions and specifications may vary according to factory of manufacture or changes due to product improvements. No warranty is neither expressed nor implied nor statutory is made by Gillies Metaltech in this document unless expressly stated in any sale and purchase agreement entered into between Gillies Metaltech and the user.