



ACCESSORIES

RECYFIX® Plus 200



Trash box with ductile iron grating SW 2 x 85/20, black, cl. C 250, locked

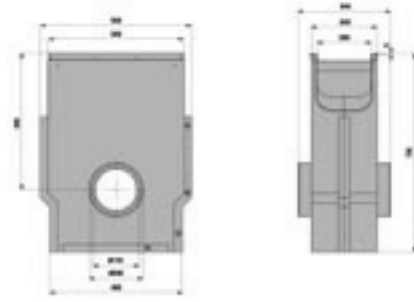

End cap combined made of PE-PP with outlet DN 70, Type 010



Foul air trap, vertical, DN 100

	Length mm	Width mm	Height mm	Weight kg	Article No. galvanised angle housing	Article No. stainless steel angle housing
Trash box with mesh grating MW 30/30, galvanised, cl. B 125, locked	500	248	735	27,6	40756	-
Trash box with mesh grating MW 30/10, galvanised, cl. B 125, locked	500	248	735	29,2	40757	-
Trash box with GUGI-ductile iron grating MW 20/30, black, cl. C 250, locked	500	248	735	31,4	40753	-
Trash box with ductile iron grating SW 2 x 85/20, black, cl. C 250, locked	500	248	735	31,2	40754	-
Foul air trap, vertical, DN 100	-	-	-	0,5	40295	-
End cap combined made of PE-PP with outlet DN 70, Type 010	-	258	185	0,2	40692	-
End cap closed, Type 01	-	260	275	0,9	12081	12581
Drilling of connecting holes DN 200	-	-	-	-	974	-
Cutting to length of NW 200	-	-	-	-	992	-
Sealing material SikaBond TS Fast, 600 ml, tubular bag, black	-	-	-	0,6	6890	-
Tubular pistol for Sikaflex TS Fast	-	-	-	1,3	6891	-