


Single Chamber, Reduced Bore Main Control Valve

The Singer 206-PG series main valve is used as the basis for a large variety of control valve applications such as pressure, flow or level control. This hydraulically operated valve introduces or releases water from the control chamber above the diaphragm to effectively maintain accurate water control.

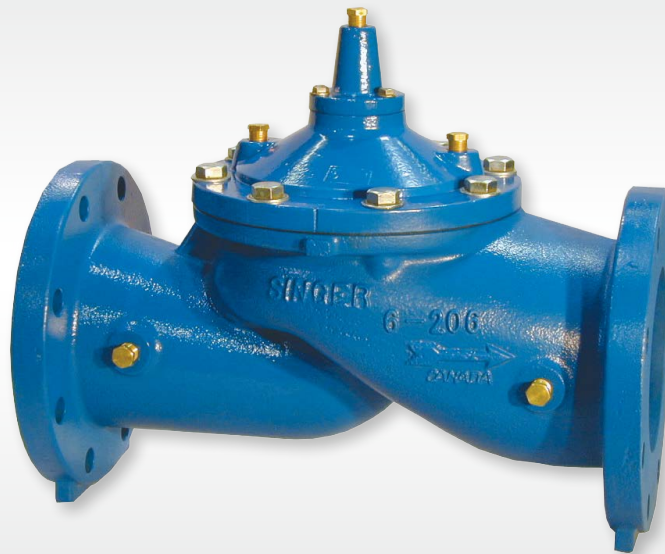

TECHNICAL GUIDE: **AVH1.13**

Applications

Potable water
Pressure systems
Municipal
Mining Applications
Irrigation Applications

Product Attributes

Versatile valve that can be configured for a variety of applications
Available in globe and angle style
Reduced bore for enhanced control

Approvals/Standards

AS 5081:2008
Flanges to AS/NZS 4087 Fig. B5
Coating complies with AS/NZS 4158

Quality

ISO 9001:2015 Quality Management Systems

The heart of any Singer 206 Control Valve is the Ductile Iron 206-PG Full Bore Main Valve Body. These are hydraulically controlled to operate as pressure, flow, or level control valves.

This hydraulically operated valve introduces or releases water from the control chamber above the diaphragm to effectively maintain water control. Further adapt the valve to provide control for a wide range of functions by selecting from Singer Valve's wide range of pilot and accessories options. Customise for functions like controlling pressure, flow or level or in almost limitless combinations to suit specific applications.

Selection

Automatic control valves operate by introducing or exhausting water from above the diaphragm at controlled rates. A pressure differential is required and is either inlet to outlet or inlet to atmosphere, depending on the application. Valves are sized to provide an appropriate pressure drop for each application. Most valves require a minimum of 0.7 bar pressure drop to operate. This applies mostly to valves that have the bonnet vented to downstream. With minimum of 0.35 bar downstream pressure, many valves can be made to open fully by venting the bonnet to atmosphere.

Singer Valve control valves are designed for use with clean potable water. Applications for other media are possible. Consult with Hygrade.

Careful consideration of the possibility of cavitation must be given. Anti-cavitation trim is available to control the cavitation, reduce noise and prevent damage. Contact Hygrade for more details on the 106-AC Anti-Cavitation Control Valve.

The Singer Model 206-PG single chambered valve is the basic valve used in practically every model bearing the 206 description. The pilot systems are designed to meet the functional and performance requirements of specific applications. Sizing is ultimately determined by the specific application.


Refer to the Singer Control Valve Sizing Calculator on our website for assistance.

Schematic Drawing

1. Removable Stem Cap
2. ASTM A536 Ductile Iron Construction
3. Diaphragm Buna-N or EPDM
4. Buna-N or EPDM Resilient Disc
5. AISI 316 Stainless Steel Seat
6. AISI 316 Stainless Steel Stem
7. NSF 61 Fusion Bonded Epoxy Coating



FIG. 1 Alternative models A206-PG Angle

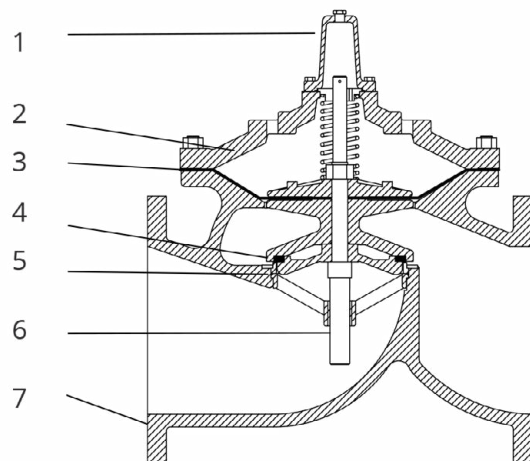

AVAILABLE OPTIONS

Further customise the valve by adding any of the available options below.

Main valve options

Position Indicators (Available for install during assembly or as a field modification)

- Model X107 stem mounted position indicators
- Model X129 limit switch assembly with Single Pole Double Throw limit switch (Double Pole Double Throw optional)
- Model X156 position transmitter (4 to 20 mA)
- Oxy-Nitride Stem
- Internal Drop Check
- External Spring Lift
- Grooved Ends
- Reclaimed Water

Materials of construction

Individual components can be upgraded from ductile iron, bronze and brass to stainless steel, for most sizes. Consult with Hygrade.

Model PGM

Provides a fully operational back-up system in the event of a diaphragm or pilot failure.

TABLE 1 Valve Styles and Sizes

	Standard (Flanged)	Optional
Globe	80-1200mm	-
Angle	100-200mm	-

TABLE 2 Valve Components

	Standard	Optional
1. Valve Body, Cover	65-45-12 Ductile Iron	-
2. Seat Ring	316 Stainless Steel	-
3. Disc Retainer	B16 Brass / B62 Bronze / A536 Ductile Iron	316 Stainless Steel
4. Stem	316 Stainless Steel	-
5. Stem Nut	B16 Brass	316 Stainless Steel
6. Spring	316 Stainless Steel	-
7. Guide Bushings	B16 Brass or SAE 660 Bronze	316 Stainless Steel
8. Diaphragm	EPDM	Buna-N / Viton (limited sizes)
9. Resilient Disc	EPDM	Buna-N / Viton (limited sizes)
10. Coating	NSF61 Approved Fusion Bonded Epoxy - Thickness 250-300 microns in accordance to AS/NZS 4158	Consult factory
11. Fasteners	AISI 18-8 Stainless Steel	AISI 316 Stainless Steel

TABLE 3 206-PG Flow Capacity at 14m/s

Code	Size (mm)	Continuous (L/s)	Intermittent (L/s)	Momentary (L/s)
CV080BODY206S-PG	80	19	24	36
CV100BODY206S-PG	100	37	44	78
CV150BODY206S-PG	150	65	75	136
CV200BODY206S-PG	200	145	170	303
CV250BODY206S-PG	250	259	295	530
CV300BODY206S-PG	300	404	465	833
CV400BODY206S-PG	400	582	661	1211
CV450BODY206S-PG	450	1041	1320	1893
Indent	500	1041	1320	1896
Indent	600 x 400	1041	1320	1899
Indent	600 x 500	1370	1640	2460
Indent	700	2120	2362	4255
Indent	750	2120	2362	4255
Indent	800	2126	2368	4261
Indent	900	2132	2375	4268
Indent	1000	3500	4375	3912



Scan for more
information

Disclaimer: While every effort has been made to ensure that the information in this document is correct and accurate, users of Hygrade Water Infrastructure product or information within this document must make their own assessment of suitability for their particular application. Product dimensions are nominal only, and should be verified if critical to a particular installation. No warranty is either expressed, implied, or statutory made by Hygrade Water Infrastructure unless expressly stated in any sale and purchase agreement entered into between Hygrade Water Infrastructure and the user.

November 2024

+61 7 38059186
hygradewater.com.au

BRISBANE (Head Office) 42-44 Blue Eagle Drive, Meadowbrook, QLD 4131
SYDNEY 2/35 Prime Dr, Seven Hills NSW 2147, Australia
MELBOURNE 20A Frances Drive, Dandenong South 3175

HW **HYGRADE WATER**
INFRASTRUCTURE