

Singer F-Type 5 Non Modulating Float Valve

The 106-F-Type 5 and 206-F-Type 5 non-modulating float valves are based on the 106-PG or 206-PG main valve. It is ideal for allowing normal forward flow to fill water reservoirs to a desired high level and where the pilot and valve of the reservoirs are easily accessible.



TECHNICAL GUIDE: **AVH1.35**

Applications

Pressure Control
Remote and standalone applications
Mining Applications

Product Attributes

Quick opening relief
No electrical services required
Easily adjustable pressure settings

Approvals/Standards

AS 5081:2008
Flanges to AS/NZS 4087 Fig. B5
Coating complies with AS/NZS 4158

The 106-F-Type 5 and 206-F-Type 5 non-modulating float valves are based on the 106-PG or 206-PG main valve. It is ideal for allowing normal forward flow to fill water reservoirs to a desired high level and where the pilot and valve of the reservoirs are easily accessible.

The valve functions as a two position valve, either open or closed. The valve remains closed when the reservoir level drops, until the float reaches the pre-determined adjustable minimum reservoir level. The F-Type 5 valve then opens to refill the reservoir and closes tightly when high water level is achieved.

KEY FEATURES

- No overflow, drip-tight close
- Adjustable draw down
- Easily adjustable level settings
- Low supply pressure options

TYPICAL APPLICATION

Non-modulating float valves are typically used in buildings with reservoir tanks or installations where the valve and pilot are readily accessible.

The on / off service ensures that the reservoir contents are cycled. It will also prevent over cycling of the supply pumps as the minimum quantity per cycle is adjustable.

STANDARD MATERIALS

Standard materials for pilot system components are:

- ASTM B-62 bronze or ASTM B-16 brass
- Copper float

Note: The stilling well and the connections between main valve and pilot completed by others.

SELECTION SUMMARY

1. Generally select line size to minimize losses during normal forward flow - see chart of maximum continuous flow below.
 2. Use the performance curves and sizing bulletin to determine the pressure drop across the valve at normal flow rate.
 3. Check the maximum operating pressure against the maximum working pressure rating of the flanges.
 4. For pressures greater than 80 psi / 5.5 bar, consult factory
 5. If the outlet pressure is less than 35% of the inlet pressure, check for cavitation.
 6. If the inlet pressure is less than 10 psi / 0.70 bar higher than the reservoir head, consult with Singer Valve. Assisted opening may be required for full flow.
- To maintain a relatively steady tank level, refer to model 106-F-Type 4 / 206-F-Type 4
 - For SCADA or electronic level control, refer to model 106-2SC-PCO / 206-2SC-PCO Dual Solenoid Control Valve

ORDERING INSTRUCTIONS

Refer to Hynds for the order form and ordering instructions.

Additionally, include the following information for this product:

1. Single chamber (106) or (206)
2. Pilot range

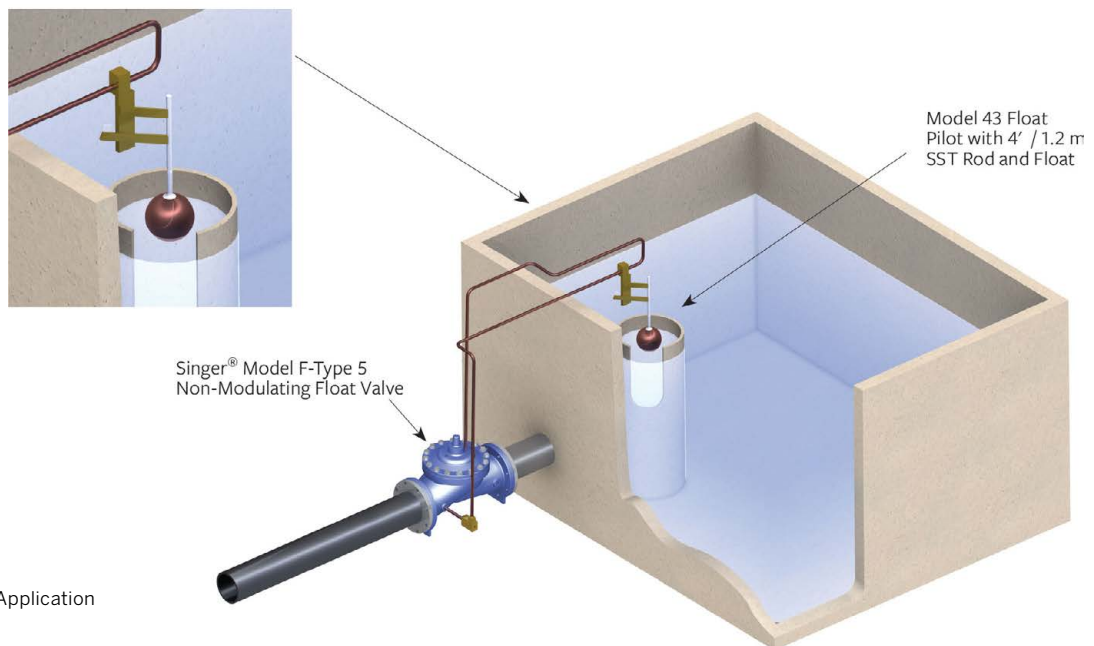


FIG. 1 Typical Application

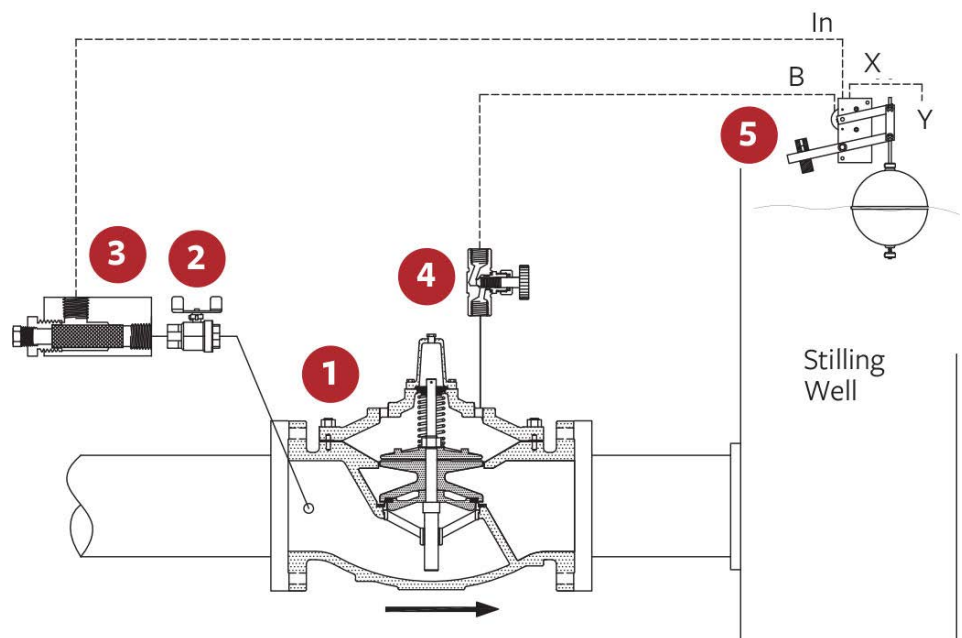


FIG. 2 Schematic A-0421C

Schematic Drawing

1. Main valve - 106-PG or 206-PG
2. Isolation valve
3. Strainer - 40 mesh stainless steel screen
4. Opening / closing speed control
5. Model 43 Float Pilot c/w SST float, 1.2 m SST rod

TABLE 1 Singer F-TYPE 5 106 / 206-F-TYPE 5 Non Modulating Float Valve
(See 106-PG and 206-PG main valve section for other valve data)

Size (mm)	106-PR-R			206 PR-R		
	Min (L/s) Flat Diaphragm	Min (L/s) Rolling Diaphragm	Maximum Continuous (L/s)	Min (L/s) Flat Diaphragm	Min (L/s) Rolling Diaphragm	Maximum Continuous (L/s)
15mm	0.1	-	0.8	-	-	-
19mm	0.1	-	1	-	-	-
25mm	0.1	-	3	-	-	-
32mm	0.1	-	6	-	-	-
40mm	0.1	-	8	-	-	-
50mm	0.3	-	13	-	-	-
65mm	0.3	-	19	-	-	-
80mm	0.3	-	29	0.3	-	19
100mm	0.6	-	50	0.3	-	37
150mm	1.3	0.1	114	0.6	-	65
200mm	2.5	0.1	196	1.3	-	145
250mm	-	0.2	309	2.5	-	260
300mm	-	0.2	442	-	0.2	404
350mm	-	0.2	536	-	-	-
400mm	-	0.2	694	-	0.2	1040
450mm	-	-	-	-	0.2	1040
500mm	-	0.6	1104	-	0.2	1040
600mm	-	0.6	1628	-	-	-
600 x 400mm	-	-	-	-	0.2	1040
600 x 500mm	-	-	-	-	0.2	1370
700mm	-	-	-	-	0.6	2120
750mm	-	-	-	-	0.6	2123
800mm	-	-	-	-	0.6	2126
900mm	-	1.3	3500	-	0.6	2132
1000mm	-	-	-	-	1.3	3500
1200mm	-	-	-	-	1.3	3500



Scan for more information

Disclaimer: While every effort has been made to ensure that the information in this document is correct and accurate, users of Hygrade Water Infrastructure product or information within this document must make their own assessment of suitability for their particular application. Product dimensions are nominal only, and should be verified if critical to a particular installation. No warranty is either expressed, implied, or statutory made by Hygrade Water Infrastructure unless expressly stated in any sale and purchase agreement entered into between Hygrade Water Infrastructure and the user.

September 2025